


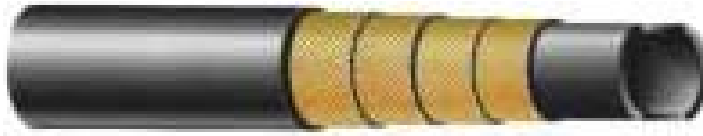

DATA SHEET

DIN EN 856 4SP

**Hose Construction:**

- Tube: oil resistant synthetic rubber
- Reinforcement: four high tensile steel wire braid
- Cover: abrasion and weather resistant synthetic rubber
- Temperature Range: -40°C to +100°C (+120°C max)

Hose I.D.		I.D.	Braid	O.D.	W.P.	T.P.	B.P.	B.R.	Weight	HOS
Inch	Dash	mm	mm	Mm	bar	bar	bar	mm	Kg/m	Ferrule
3/8	10	9.5	17.5	21.4	445	1070	1780	180	0.78	0009-06
½	12	12.7	20.2	24.6	415	995	1660	230	0.93	0009-08
5/8	16	15.9	23.8	28.2	350	840	1400	250	1.17	0009-10
¾	19	19.0	28.2	32.2	350	840	1400	300	1.48	0009-12
1	25	25.4	35.3	39.7	280	670	1120	340	2.02	0009-16
1-1/4	31	31.8	46.0	50.8	210	500	840	460	3.05	0009-20
1-1/2	38	38.1	52.4	57.2	185	445	740	560	3.52	0009-24
2	51	50.8	65.3	69.8	165	400	660	660	5.20	0009-32

Lengths in accordance with EN-specification