




DATA SHEET

SAE 100 R2AT

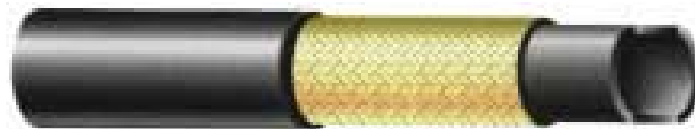

Hose Construction:

Tube: oil resistant synthetic rubber
 Reinforcement: two high tensile steel wire braid
 Cover: abrasion and weather resistant synthetic rubber
 Temperature Range: -40°C to +100°C (+120°C max)

Hose I.D.		I.D.	Braid	O.D.	W.P.	T.P.	B.P.	B.R.	Weight	HOS
Inch	Dash	mm	mm	Mm	bar	bar	bar	mm	Kg/m	Ferrule
¼	4	6.4	12.7	15.0	345	690	1380	100	0.30	0021-04
5/16	5	7.9	14.3	16.6	293	586	1172	115	0.36	0021-05
3/8	6	9.5	16.7	19.0	276	552	1103	130	0.49	0021-06
½	8	12.7	19.8	22.2	241	483	965	180	0.56	0012-08
5/8	10	15.9	23.0	25.4	190	380	760	200	0.60	0012-10
¾	12	19.0	27.0	29.3	155	310	620	240	0.83	0012-12
1	16	25.4	34.9	38.1	138	276	552	300	1.22	0021-16
1-1/4	20	31.8	44.5	48.3	112	224	448	420	1.91	0021-20
1-1/2	24	38.1	50.8	54.6	86	172	345	500	2.17	0021-24
2	32	50.8	63.5	67.3	78	155	310	630	2.74	0021-32

Lengths in accordance with EN-specification